


	6030-DR-075	Input
		100-240VAC 2,0 A
		Output
		24VDC 3 A 75 VA
		Afmetingen (AxBxC)
		A = 5,6 cm B = 12,5 cm C = 11 cm

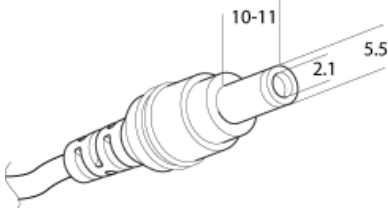
	6030-DR-120	Input
		100-120VAC/200-240VAC 3,3 A / 2,0 A
		Output
		24VDC 5 A 120 VA
		Afmetingen (AxBxC)
		A = 6,6 cm B = 12,5 cm C = 11 cm

	6030-DR-240	Input
		100-240VAC 3,5 A
		Output
		24VDC 10 A 240 VA
		Afmetingen (AxBxC)
		A = 12,6 cm B = 12,5 cm C = 11 cm

	6030-DR-480	Input
		200-240VAC 4,0 A
		Output
		24VDC 20 A 480 VA
		Afmetingen (AxBxC)
		A = 22,7 cm B = 12,5 cm C = 11 cm

Rail Type	P *)	Max. kabel lengte per diameter		
		0.75 mm ²	1 mm ²	1.5 mm ²
6200	45W	22 m	30 m	45 m
6300	20W	56 m	75 m	112 m

*) middelzwaar gordijn, kamerhoog, glijder 4010 zonder hoofdje

<p>6034-24V-C1 1x connector voor 24V DC power plug</p> <ul style="list-style-type: none"> - Coaxial power plug - 'Center positive' - Min. 22V - Max. 28V - 2,1 x 5,5 x 10-11 mm - Kabel lengte 122 cm 
--

